



UltraLife Wi-Fi series is especially practical for long term surveillance devices. This module is equipped with low PIR sensor and **Wi-Fi functionality** that allows you to monitor places with low activity movements for a long period of time. The module is placed manually to the covert PIR module, which makes it virtually unrecognizable from the real PIR sensor.


QUICK SET-UP GUIDE:

- Download application „Yi Eye“
 - Connect the device with supplied USB
 - Connect your phone local Wi-Fi
 - Open Yi Eye
 - Click on the + sing
- If the device has blinking RED diode ► Click on RED LED IS BLINKING
- Type in you Wi-Fi password and press „Connect to Wi-Fi“ after that you choos: **Password for you camera**
 - Click on Start Smart Config
 - Your device is now being connected to internet. Click SAVE

PACKAGE CONTAINS



PARTS DESCRIPTION

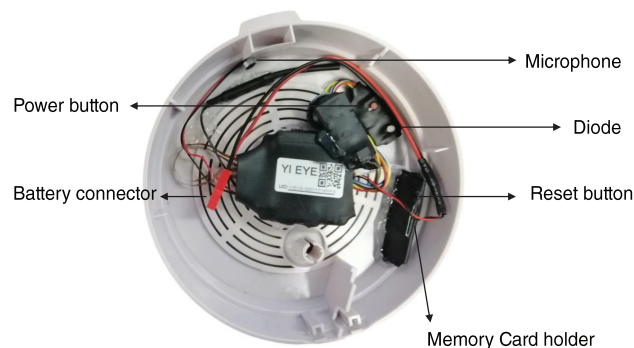

TROUBLESHOOTING

Connecting to the application

If the red diode is not blinking, charge the unit again and restart the device by holding power button for 3 seconds then hold RESET button for 20 seconds.

STATS

- **Working modes**
 - recording moder for motion detection
 - online preview via mobile phone
 - recording in an infinite loop
- **Camera 1.3Mpix CMOS sensor**
 - angle of view of 70°
 - 3.6mm lens
 - light sensity 1 Lux
- **Recordings resolution 1280x720px**
 - .AVI video format
 - adjustable recording length 10-60
 - recordings of dates and times
 - the ability to remotly play and export records
 - avarage 360MB / 1h of recording
- **Microphone**
 - sensitivity up to 3-5 meters
- **Battery**
 - 3.7V 5400mAh Li-Pol
 - up to 180 days in PIR mode
 - lasts about 20 hours of continuous recording
 - lasting 1h daily for apporomivately 19 days
- **Consumption**
 - Consumption 1-2mA - PIR mode
 - 250mA - Recording
 - 350mA - online transmission
- **Power supply**
 - DC 5V 1A
- **External memory**
 - micro US up to 32GB
 - up to 88 hours of recording
- **Dimensions 107 x 58 x 45 mm**